




DIMENSIONS / 尺寸

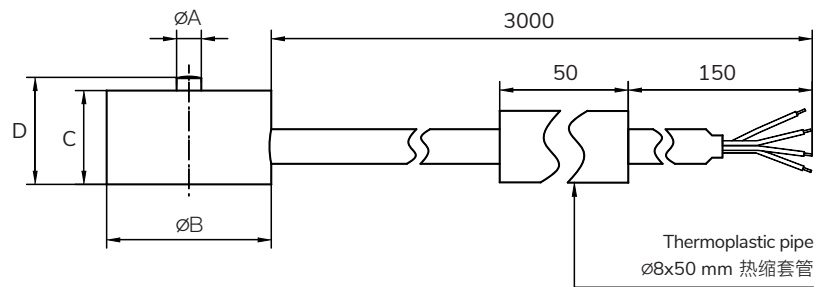


FEATURES & APPLICATIONS / 特点和用途


- Compression Type
- Low Deflection
- Ultra Fast Response
- Impressive Repeatability
- Adjustable Resistance For Zero Adjustment
- Suitable For Limited Spaces
- Various Applications Such As Automation Industry

- 压式传感器
- 低挠度, 不易变形
- 超快速反应
- 重复性显著
- 传感器外部有一可调电阻, 用于调零
- 适用于小空间内的力测量
- 适用于自动化行业等各种应用领域

LOAD DIRECTION / 受力方向



SCHEMATIC WIRING DIAGRAM / 接线图

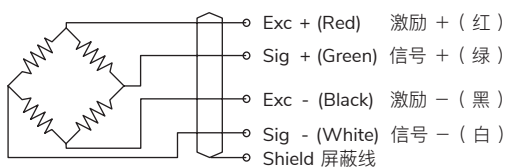

**Note:** Cable shield is not connected to element.  
注: 屏蔽线不与弹性体相连。

CAPACITIES / 量程

CAP (Kg)	SIZE (mm)	øA	øB	C	D	Material / 材料
3		1	10	5.2	6	Aluminum Alloy / 铝合金
5 / 10		1.5				Stainless Steel / 不锈钢
20 / 30		2				
50 / 100		2.5				

SPECIFICATIONS 详细描述      TECHNIQUE / 技术指标

PERFORMANCE	产品性能	
Non-Linearity	非线性	±1% of RO
Hysteresis	滞后	±0.5% of RO
Repeatability	重复性	±0.5% of RO
ELECTRICAL	电气特性	
Rated Output	输出灵敏度	1.0 ± 10% mV/V
Recommended Excitation	激励电压	5 VDC
Maximum Excitation	最大激励电压	7 VDC
Input Impedance	输入电阻	1030 ± 80 Ω
Output Impedance	输出电阻	1030 ± 80 Ω
Insulation	绝缘电阻	≥5000 MΩ / 100 VDC
Cable Color Code	连接方式	Input/输入: Red / 红 (E+)    Black / 黑 (E-) Output/输出: Green / 绿 (S+)    White / 白 (S-)
MECHANICAL	机械特性	
Weight	产品重量	0.1Kg
Safe Overload	安全超载	120% of RO
Ultimate Overload	极限超载	150% of RO
Material	材料	See Table Above / 参照上述表格
Cable Size	电缆线尺寸	ø2 x 3000 mm
IP Rating	防护等级	IP65
TEMPERATURE	温度特性	
Operating Temperature	工作温度范围	-20 ~ 80°C
CONFORMITY	遵循	
RoHS		2011/65/EU
CE		2014/35/EU